





TRUCK & BUS TIRES

TECHNICAL CATALOGUE



catalogue



Web



LINGLONG AMERICAS, INC.
Add: 1484 Medina Road, Suite 118 Medina OH 44256



E-mail
linglong_sales@linglong.cn



Web
<https://atlas-tires.com>

COMPANY INTRODUCTION

ATLAS TIRE

”

Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn



ATLAS TIRES

<https://atlas-tires.com>

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024.

Linglong has sponsored over

100

sports events and teams worldwide

Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



ATLAS TIRES

<https://atlas-tires.com>

GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.




R&D Center in America


R&D Center in Germany

Serbia


Linglong International Europe d.o.o.Zrenjanin

R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in jinan

Linglong Tyre Co.,Ltd.

- jilin Linglong Tyre co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.


Linglong International Tyre(Thailand)Co.,Ltd

7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.



ATLAS TIRES

<https://atlas-tires.com>

SOCT--STRESS OPTIMIZATION CONTROL TECHNOLOGY

New structure

Four belt structure to optimized grounding pressure distribution.wear and anti-groove crack upgrade

New Compound

Using a new type of nanoscale low hysteresis loss composite material
(Ensure wear and lower rolling resistance)

New cord material

UT ultra-high strength wire and reinforced structure
(to ensure safety and service life)

New profile and pattern

Account rolling resistance,wet grip and noise performance



ATLAS TIRES

<https://atlas-tires.com>

CATALOGUE

WELCOME TO ATLAS TIRES

LONG HAUL 11

REGIONAL 25

ON&OFF ROAD 41



LONG HAUL

PAGE 11 ~ 30

EcoLine D11	13	EcoLine S11	15	EcoLine T17	17
EcoLine D17	19				
STRD-09	21	STRD-09e+	21	DRV-09	22
DRV-09e+	22	STRD-09e+ II	23	DRV-29e+	23
DRV-98	24	TR-98	24	DRV-29e+	24

EcoLine D11 EcoLine S11 EcoLine D17 EcoLine T17



EcoLine D11

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	144/141L	14	G	9.00	5675	110	6175	110	40.39	11.73	30
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	40.39	11.73	30



DRIVE

ORIGIN: THAILAND

HOT


EcoLine D11

TREAD DESIGN

GOOD WET GRIP

GOOD GRIP

RESISTANCE

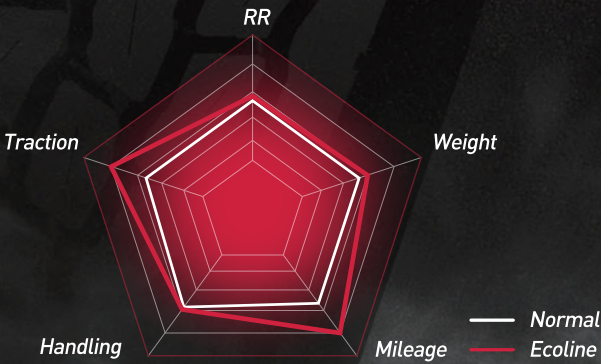

- 1 Closed shoulder promoted uniform wear and improved rolling resistance
- 2 Z-Zag groove provides good traction performance
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture



EcoLine S11

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	Single psi	lbs			
295/75R22.5	144/141L	14	G	9.00	5675	110	6175	110	39.92	11.73	18
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	39.92	11.73	18
295/75R22.5	149/146L	18	J	9.00	6610	123	7160	123	39.92	11.73	18



STEER

ORIGIN: THAILAND

HOT


EcoLine S11

TREAD DESIGN

GROUND GRIP

DURABILITY

MILEAGE

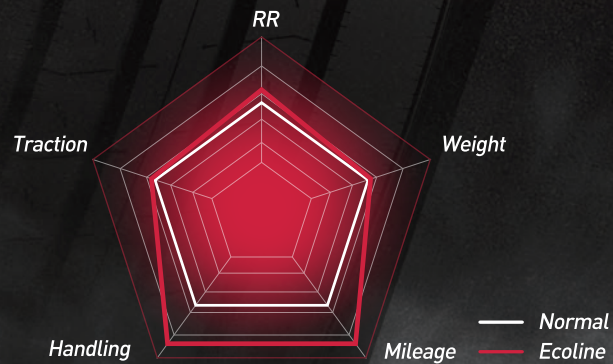

- 1 Open designed decoupling groove for enhanced even wear performance
- 2 Outer groove and shoulder sipes to extend tire life by protecting against cracking and tearing
- 3 Center rib diagonal sipes to promote even wear and grip
- 4 Exclusive velvet knurled font design for the high-end series, offering a more premium texture



<https://atlas-tires.com>

EcoLine D17

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	40.24	11.54	26
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.53	11.06	26
11R24.5	149/146L	16	H	8.25	6610	120	7610	120	43.5	11.06	26




DRIVE

ORIGIN: THAILAND

HOT

EcoLine D17

TREAD DESIGN

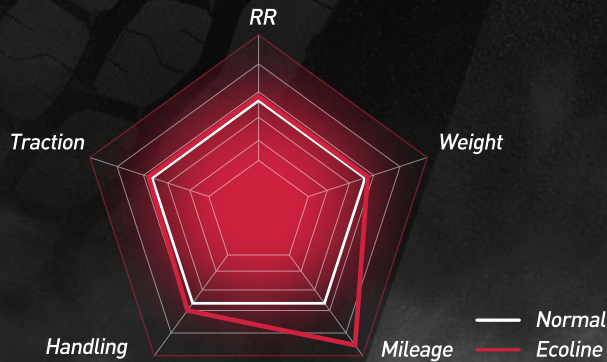

- 1 Closed shoulder promoted uniform wear and improved rolling resistance
- 2 Z-Zag groove provides good traction performance
- 3 Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread
- 4 Meet Smartway Verified standard



EcoLine T17

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	39.41	11.42	12
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	40.94	11.1	12
11R24.5	149/146L	16	H	8.25	6610	120	7610	120	42.91	11.1	12



ORIGIN: THAILAND

HOT


EcoLine T17

TREAD DESIGN

WEAR-RESISTANT

RESISTANCE

GROUND GRIP

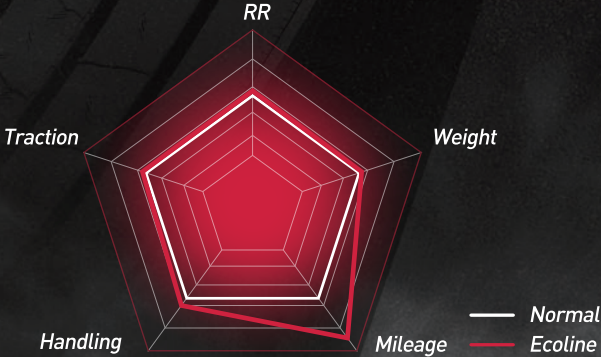

- 1 Closed shoulder promoted uniform wear and improved rolling resistance
- 2 Micro sipes on groove edges resists abnormal or "river wear"
- 3 Decoupling groove helps resist uneven shoulder wear
- 4 Meet Smartway Verified standard





STRD-09



- Good handling.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA



DRV-09



- Good braking and grip on wet road.
- Long life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA



STRD-09e+



- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

★ SmartWay®



DRV-09e+



- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	22.0	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	22.0	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

★ SmartWay®



STRD-09e+ II



- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.0	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.0	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	12.0	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	12.0	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	12.0	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	12.0	TRA



DRV-29e+



- Closed shoulder design helps promote uniform wear throughout the life of the tire.
- Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- Optimized the footprint for long and even wear.
- Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.97	10.98	30.0	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.97	10.98	30.0	TRA
11R24.5	14	146/143	L	8.25	6005	104	6610	104	43.98	10.98	30.0	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.98	10.98	30.0	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	42.01	11.14	30.0	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	42.01	11.14	30.0	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.47	11.73	30.0	TRA
295/75R22.5	16	146/143L	L	9.00	6005	120	6610	120	40.47	11.73	30.0	TRA



DRV-98



- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
* 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
* 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA

* SmartWay



TR-98



- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
* 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	13.2	TRA
* 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	13.2	TRA

* SmartWay



TR-09e+



- Low fuel consumption.
- Certified by U.S.A SmartWay.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	psi	lbs	psi				
* 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.6	TRA
* 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.6	TRA
* 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
* 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
* 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
* 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

* SmartWay

REGIONAL

PAGE 25 ~ 40

EcoLine D27	27	EcoLine T27	29	EcoLine A27	31
EcoLine A27s	33				

AP-09	35	AP-100	35	APW-093	36
APW-092	36	AP-100e+	36	DRV-OS	37
DRV-OS V	37	AP-800	38	TR-09	38
AW-09	39	DRV-OS IX	39	STR-29e+	40

EcoLine D27 EcoLine T27 EcoLine A27 EcoLine A27s



EcoLine D27

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	40.5	11.54	30
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	8.25	6610	120	7610	120	43.75	11.06	30



DRIVE

ORIGIN: THAILAND

HOT

EcoLine D27


TREAD DESIGN



IMMOBILIZE



TRACTIVE FORCE

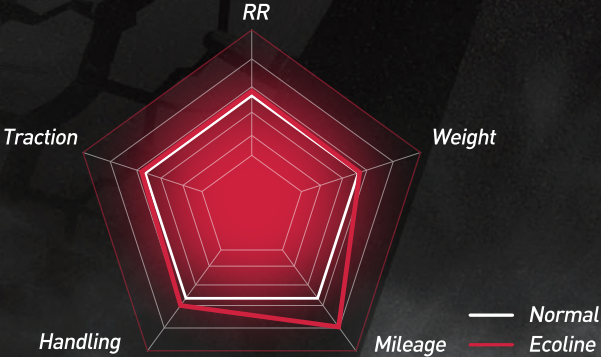

- 1 Open shoulder offers good traction and help with heat dissipation
- 2 Aggressive pattern and lateral grooves provides tire excellent drive and braking performance
- 3 Two main grooves helps to provide good handling performance



<https://atlas-tires.com>

EcoLine T27

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	39.72	11.42	17
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.26	11.1	17
11R24.5	149/146L	16	H	8.25	6610	120	7610	120	43.23	11.1	17




TRAILER

ORIGIN: THAILAND

HOT

EcoLine T27

TREAD DESIGN

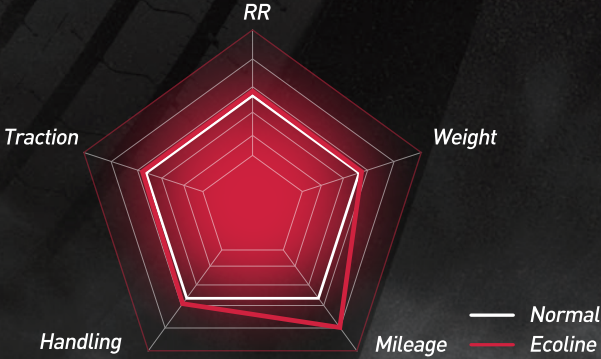

- 1 Wide, continuous shoulder ribs fight turning side forces and resist tearing
- 2 Micro sipes on groove edges resists abnormal or “river wear”
- 3 Deep tread depth for high-Scrub trailer service



EcoLine A27

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	39.93	11.54	21
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.21	11.06	21
11R24.5	149/146L	16	H	8.25	6610	120	7610	120	43.18	11.06	21
255/70R22.5	140/137M	16	H	7.50	5070	120	5510	120	36.55	10.16	17
215/75R17.5*	135/133J	16	H	6.00	4540	123	4805	123	30.24	8.35	16
225/70R19.5	128/126L	14	G	6.75	3750	110	3970	110	31.83	8.94	16
235/75R17.5*	143/141J	18	J	6.75	5675	127	6005	127	31.34	9.29	17
245/70R19.5	135/133L	16	H	7.50	4540	120	4805	120	32.95	9.61	17

* Low profile trailer



ALL POSITION

ORIGIN: THAILAND


HOT

EcoLine A27


TREAD DESIGN

RESISTANCE

GOOD HANDLING

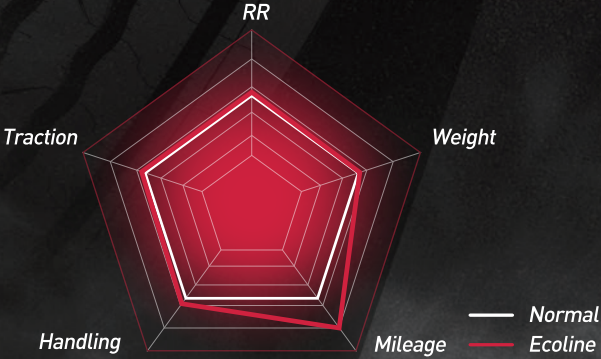

- 1 A combination of 4 wavy and straight groove provide outstanding traction and drainage performance for a smoother ride and better handling
- 2 Optimized rib distribution proportioned for added stiffness, which helps reduce irregular wear
- 3 Tough tread compound and solid shoulder ribs to resist maneuvering scrub

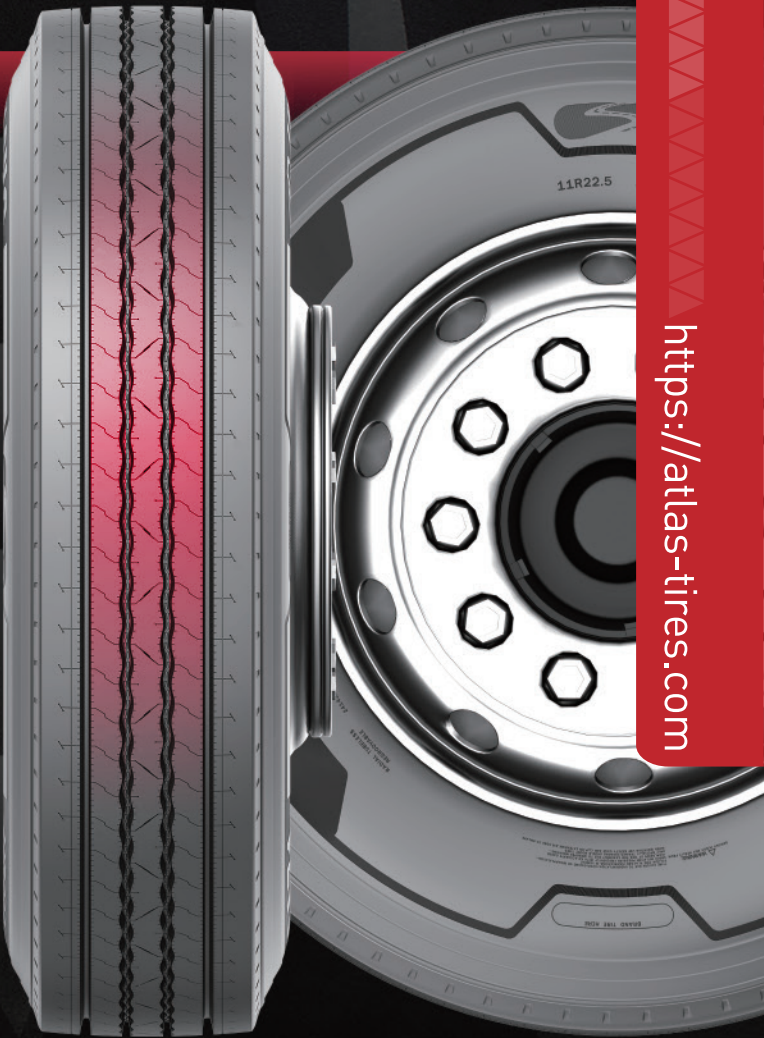

EcoLine A27s

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
225/70R19.5	128/126M	14	G	6.75	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135/133M	16	H	7.50	4540	120	4805	120	33.14	9.61	20



ALL POSITION

ORIGIN: THAILAND

HOT

EcoLine A27s

TREAD DESIGN




GROUND GRIP



TRACTIVE FORCE



WEAR-RESISTANT

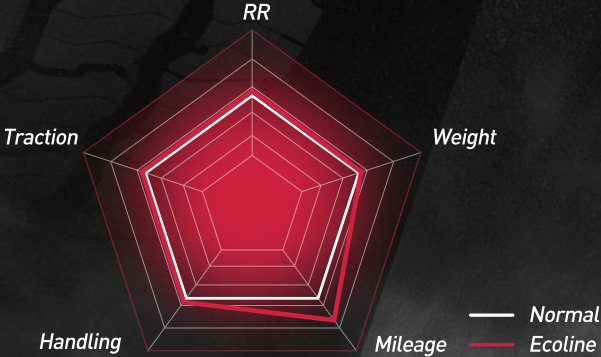

- 1 A combination of 3 wavy grooves and lateral sipes on block provide outstanding traction and drainage performance in all weather conditions
- 2 Deep tread depth of 20/32nds provides long tread life
- 3 Ecoline A27s meet 3 Peak Mountain Snow Flake (3PMSF) criteria for snow traction performance. (Under certification)
- 4 Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls



1.


2.


3.


AP-09

- Suitable for all position axle of buses and trucks.



1.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						lbs	Dual psi	Single psi					
	9R22.5	12	133/131	M	6.75	4300	105	4540	105	38.35	9.02	17.0	TRA
	9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	17.0	TRA
	10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	17.6	TRA
	10R22.5	14	144/142	L	7.50	5840	123	6175	123	40.12	10.00	17.6	ETRTO
	10R22.5	16	144/142	L	7.50	5840	130	6175	130	40.12	10.00	17.6	GB

2.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						lbs	Dual psi	Single psi					
	215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	15.7	ETRTO
	215/75R17.5*	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO

3.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						lbs	Dual psi	Single psi					
	235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	16.4	ETRTO
	235/75R17.5*	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
	235/75R17.5*	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO

* Low profile trailer



AP-100

- Special design for all position axle of trucks.
- Good uneven wear resistance.
- High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi					
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.50	10.98	18.3	ETRTO
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA



APW-093

- Suitable for all position axle of the trucks running on the multi road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi					
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO



APW-092

- Suitable for all position axle of the trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi					
385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160	J	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO



AP-100e+

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi					
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

★ SmartWay



DRV-OS



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single lbs	psi				
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.69	10.98	25.8	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.69	10.98	25.8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.69	10.98	25.8	ETRTO
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.70	10.98	25.8	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.70	10.98	25.8	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.16	11.73	25.8	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.16	11.73	25.8	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.57	11.14	25.8	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.57	11.14	25.8	TRA



DRV-OS V



- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single lbs	psi				
215/75R17.5	12	124/123	M	6.00	3415	100	3525	100	30.20	8.31	18.9	ETRTO
215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	18.9	ETRTO
215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	19.5	ETRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	19.5	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	19.5	ETRTO
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	22.0	ETRTO
295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	22.0	GB
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	22.0	ETRTO



AP-800



- Suitable for all position axle of trucks running on the multi road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single lbs	psi				
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	18.9	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	18.9	ETRTO
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	20.2	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	20.2	ETRTO



TR-09



- Suitable for the trailer axle of the trucks running on the high-grade road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single lbs	psi				
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	13.5	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	13.5	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	13.5	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	13.5	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	13.5	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	13.5	TRA
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	13.5	TRA



REGIONAL

<https://atlas-tires.com>



AW-09



- Suitable for medium trucks running on the high-grade road.

	Size	Ply Rating	Load Index	Speed Symbols	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Standard Rim	lbs	Dual psi	Single psi				
▲▲	205/75R17.5	14	124/122	M	6.00	3305	109	3525	109	29.65	8.03	ETRTO
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	TRA
	225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	TRA
	245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	TRA
▲▲	245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	ETRTO
	245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	TRA
▲▲	245/70R19.5	16	136/134	M	7.50	4675	120	4940	120	33.03	9.76	ETRTO
▲▲	245/70R19.5	18	141/140	J	7.50	5510	123	5675	123	33.03	9.76	ETRTO
	265/70R19.5	16	139/136	M	7.50	4940	120	5355	120	34.13	10.31	GB
▲▲	265/70R19.5	16	140/138	M	7.50	5205	112	5510	112	34.13	10.31	ETRTO
▲▲	265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	ETRTO
▲▲	285/70R19.5	16	144/142	M	8.25	5840	116	6175	116	35.24	11.14	ETRTO
▲▲	285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	ETRTO
▲▲	285/70R19.5	18	150/147	J	8.25	6780	130	7390	130	35.24	11.14	ETRTO
	255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	TRA
▲▲	275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	ETRTO
▲▲	275/70R22.5	18	150/148	M	8.25	6945	130	7390	130	37.72	10.87	ETRTO



DRV-OSIX



- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

	Size	Ply Rating	Load Index	Speed Symbols	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Standard Rim	lbs	Dual psi	Single psi				
	225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	TRA
	225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	TRA
	245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	TRA
	245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	ETRTO
	245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	TRA
	245/70R19.5	16	136/134	L	7.50	4675	120	4940	120	33.03	9.76	ETRTO



STR-29e+



- Wide shoulder ribs reduce shoulder step wear.
- Each size is manufactured with a specially tread depth to meet a greater range of application.
- Optimized the footprint for long and even wear.
- Strong carcass materials help promote tire durability and provide tire retreadability.

	Size	Ply Rating	Load Index	Speed Symbols	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					Standard Rim	lbs	Dual psi	Single psi				
	11R22.5	14	144/142	L	8.25	5840	105	6175	104	41.57	10.98	TRA
	11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.57	10.98	TRA
	11R24.5	14	146/143	M	8.25	6005	105	6610	104	43.54	10.98	TRA
	11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.54	10.98	TRA
	255/70R22.5	14	138/134	M	7.50	4675	110	5205	110	36.61	10.04	TRA
	255/70R22.5	16	140/137	L	7.50	5070	120	5510	120	36.61	10.04	TRA
	285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.61	11.14	TRA
	285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.61	11.14	TRA
	295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.04	11.73	TRA
	295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.04	11.73	TRA



REGIONAL

<https://atlas-tires.com>

ON&OFF ROAD

PAGE 41 ~ 50

EcoWorks A37 		EcoWorks AW37 			
	43		45		
AT-08CC	47	DRV-401	47	DRV-986	48
AT50	48	APW-095	49	DRV-950	49

EcoWorks A37

EcoWorks AW37




HOT

EcoWorks A37

TREAD DESIGN



TRACTION FORCE WEAR-RESISTANT

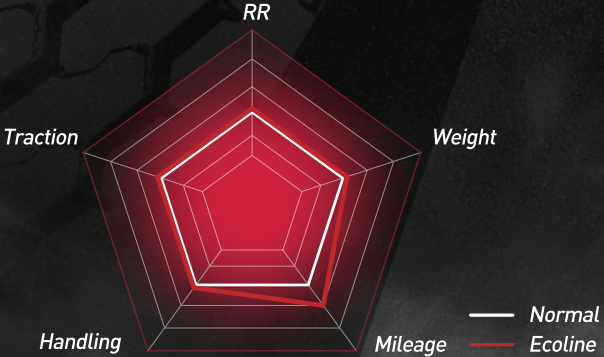

EcoWorks A37

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					lbs	Dual psi	lbs	Single psi			
255/70R22.5	140/137M	16	H	7.50	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143K	16	H	8.25	6005	120	6610	120	40.09	11.06	19
11R24.5	149/146K	16	H	8.25	6610	120	7610	120	43.06	11.06	19
315/80R22.5	157/154K	20	L	9.00	8270	130	9090	130	42.33	12.6	19



ALL POSITION

ORIGIN: THAILAND

- 1 Durable tread compound and robust shoulder designed for excellent wear resistance
- 2 3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage
- 3 Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread



EcoWorks AW37

Size	Load index& Speed symbols	PR	Load Range	Standard Rim	Max load and Max Air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
					Dual lbs	psi	Single lbs	psi			
385/65R22.5	160K	20	L	11.75	---	---	9920	130	42.22	14.96	21



ALL POSITION


ORIGIN: THAILAND

HOT

EcoWorks AW37

TREAD DESIGN

TRACTION FORCE WEAR-RESISTANT

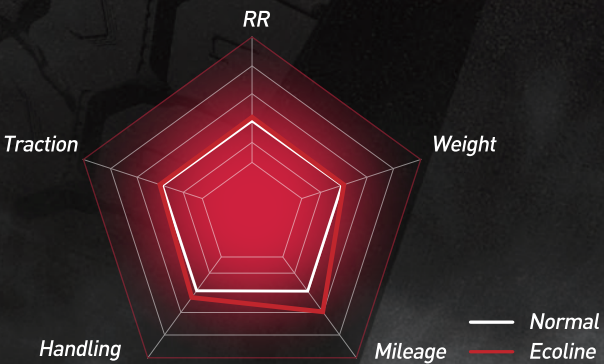

- 1 Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance
- 2 Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability
- 3 Tread compounded and constructed to resist cuts and impacts in mixed service



<https://atlas-tires.com>



AT-08CC



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.



DRV-986



- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi	lbs				
11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.50	10.98	18,9	TRA
11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.50	10.98	18,9	TRA
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	18,9	ETRTO
11R22.5	18	149/146	L/K	8.25	6610	135	7160	135	41.50	10.98	18,9	GB
12R22.5	16	152/148	K	9.00	6945	123	7830	123	42.68	11.81	21,4	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	21,4	GB
11R24.5	14	146/143	K	8.25	6005	105	6610	105	43.46	10.98	20,8	TRA
11R24.5	16	149/146	K	8.25	6610	120	7160	120	43.46	10.98	20,8	TRA
12R24.5	16	152/149	K	9.00	7160	120	7830	120	44.69	11.81	20,2	TRA
12R24.5	18	154/151	K	9.00	7610	135	8270	135	44.69	11.81	20,2	GB
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	16,0	TRA
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	22,0	ETRTO
315/80R22.5	20	157/154	K	9.00	8270	130	9090	130	42.36	12.28	22,0	ETRTO

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi	lbs				
12.00R24	20	160/156	F	8.5	8820	123	9915	123	48.27	12.32	32,1	ETRTO
11R22.5	16	146/143	F	8.25	6005	120	6610	120	41.93	10.98	30,9	TRA
11R22.5	16	148/145	F	8.25	6390	123	6945	123	41.93	10.98	30,9	ETRTO
12R22.5	16	152/148	F	9.00	6945	123	7830	123	42.68	11.81	30,9	ETRTO
12R22.5	18	152/149	F	9.00	7160	135	7830	135	43.15	11.81	30,9	GB
13R22.5	18	156/150	F	9.75	7390	127	8820	127	44.25	12.60	30,9	ETRTO
11R24.5	14	146/143	F	8.25	6005	105	6610	105	43.94	10.98	30,9	TRA
11R24.5	16	149/146	F	8.25	6610	120	7160	120	43.94	10.98	30,9	TRA
295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	30,9	ETRTO
295/80R22.5	18	152/149	F	9.00	7160	130	7830	130	41.34	11.73	30,9	GB
315/80R22.5	18	154/150	F	9.00	7390	120	8270	120	42.36	12.28	30,9	ETRTO
315/80R22.5	20	156/150	F	9.00	7390	123	8820	123	42.36	12.28	30,9	ETRTO



DRV-401



- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi	lbs				
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	25,8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	25,8	ETTRO
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	28,3	TRA
295/80R22.5	16	152/148	L	9.00	6945	123	7830	123	41.10	11.73	25,8	ETTRO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	25,8	GB



AT50



- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
					lbs	Dual psi	Single psi	lbs				
315/80R22.5	18	154/150	K	9.00	7390	120	8270	120	42.36	12.28	23,9	ETRTO
315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	23,9	ETRTO
425/65R22.5	20	165	K	13.00	---	---	11400	120	44.25	16.93	23,3	ETRTO
445/65R22.5	20	169	J/K	14.00	---	---	12800	130	45.28	17.87	23,3	ETRTO



APW-095



- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual lbs	psi	Single lbs	psi				
▲	385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
▲	385/65R22.5	20	160	J/K	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
▲	385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
	425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
▲	425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
	445/65R22.5	20	168	J/K	13.00	---	---	12300	120	45.28	17.48	22.7	TRA
▲	445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO



DRV-950



- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load And Inflated Pressure				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
						Dual lbs	psi	Single lbs	psi				
	11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.93	10.98	29.0	TRA
	11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.93	10.98	29.0	TRA
	11R24.5	14	146/143	F/G	8.25	6005	105	6610	105	43.94	10.98	31.4	TRA
	11R24.5	16	149/146	F/G	8.25	6610	120	7160	120	43.94	10.98	31.4	TRA
	295/75R22.5	16	146/143	J	9.00	6005	120	6610	120	40.39	11.73	29.0	TRA
	285/75R24.5	16	147/144	J	8.25	6175	120	6780	120	41.81	11.14	29.0	TRA



TRUCK AND BUS TIRES REPLACEMENT LIMITED WARRANTY

Warranty Eligibility

This limited warranty applies to all the qualified replacement market Truck and Bus Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode . and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

What is warranted and for how long

- The warranty period is 6 years from the date of tire production, and the remaining pattern depth is not less than TWI .
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern exceeds TWI, the new tire of the same specification will be covered free of charge.

What is not warranted

- 1.Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
- 2.Improper repairs or repairs that have failed.
- 3.Improper inflation or other maintenance abuses.
- 4.Improper mounting/dismounting.
- 5.Mechanical irregularities such as bent wheel assemblies, misalign-ment worn or faulty components.
- 6.Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.
- 7.Damage from overinflation or under-inflation, overloading, defective vehicle mechanical conditions.
- 8.Non-racing or off-road tires that are misused or abused for racing or off-road purposes.
- 9.Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.
- 10.Tire which D.O.T identification number and/or brand name removed intentionally.
- 11.Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.
- 12.Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
- 13.Vehicles or tires operated in excess of the rated Work Capacity Factor.
- 14.Additional monetary loss, such as damage of the vehicle or time, etc.

CASING WARRANTY

We offer retreading guarantees for Truck and Bus Tires. if the tires cannot be retreaded due to the manufacturer's own reasons, a subsidy will be provided. This renovation rule applies only to the United States and Canada.

ATLAS brand offer a 6-year warranty with 2 retreads; Some specified patterns offer a 8-year warranty with 4 retreads; The specific details of the specified patterns are as follows.

Brand	Warranty	Specified tire patterns
ATLAS	Warranty period for retreading is 6 years ,and can be retreaded 2 times.	EcoLine S11
	For the specified tire patterns, retreading warranty period is 8 years, and can be retreaded 4 times.	EcoLine D11

To make a claim under this limited warranty

- 1.Present your tires and the original purchase receipt to point of purchase or any the Company’ s dealer.
- 2.Complete and sign the Claim Adjustment form provided, keep a copy for your records and leave the tire with the dealer to process the warranty claim.

Owner’ s obligation

- 1.At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- 2.Refer to any authorized the Company’ s dealer or point of purchase for adjustment claim.
- 3.Owner is responsible for service charges and applicable taxes.
- 4.Submit a copy of the original purchase receipt to support the adjustment claim.

Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.